



N13TD26N0
306 mm

Control

- TouchControl

Flexibility

- Cooking zones
front: Ø 120 mm, 180 mm, 1 KW, 2 KW (max. power level 2.3 KW);
rear: Ø 145 mm, 1.2 KW;

Special features

- PotBoost
- Variable 17-stage power settings for each zone
- Digital display of the cooking levels
- 2 stage residual heat indicators
- Timer with automatic shut off for all zones
- LED timer for each zone with switch off function and acoustic signal
- Count up timer
- Control panel suspension
- Safety cut out facility
- Control panel lock
- Keep warm function
- Individual energy consumption display
- ReStart function

Design

- Ceramic glass on stainless steel trim

Technical information

- Installation measurements (mm): 270 x 490-500
- 30 cm
- Main switch
- Length connecting cable 100 cm
- Min. worktop thickness: 20 mm
- Power on indicator light
- Output 3500 W

Included accessories

Optional accessories

- Z9914X0 Connecting strip

Alternative colors available

Technical Data

Characteristics

Product name/family : Vario/Domino
cooking zone cera
Built-in / Free-standing :
CONSTR_TYPE.Built-in
Energy input : Electric
Total number of positions that can be
used at the same time : 2
Required niche size for installation
(HxWxD) : 37 x x
Width of the product (mm) : 306
Dimensions of the product (mm) : 37 x
306 x 546
Net weight (kg) : 5.0
Gross weight (kg) : 7.0
Residual heat indicator : Separate
Location of control panel : Hob front
Basic surface material : Ceramic
Color of surface : Black, Stainless steel
Color of frame : Stainless steel
Approval certificates : AENOR, CE
Length of electrical supply cord (cm) :
100
EAN code : 4242004207030

**Consumption and connection
features**
Electrical connection rating (W) : 3500
Current (A) : 13
Voltage (V) : 220-240
Frequency (Hz) : 60; 50

Neff
N13TD26N0
Electric cooktop

Predecessor:
N14K30N2

Successor:

EAN code:
4242004207030

sales programme:


N13TD26N0
306 mm



Domino combination options with corresponding appliance and cut-out measurements

Width type: 30 40 60 70 80 90
Appliance width: 306 396 606 708 826 918

	A	B	C	D	L	X
2x30	306	306	-	-	612	576
1x30, 1x40	306	396	-	-	702	666
1x30, 1x60	306	606	-	-	912	876
1x30, 1x70	306	708	-	-	1,014	978
1x30, 1x80	306	826	-	-	1,132	1,096
1x30, 1x90	306	918	-	-	1,224	1,188
2x40	396	396	-	-	792	756
1x40, 1x60	396	606	-	-	1,002	966
1x40, 1x70	396	708	-	-	1,104	1,068
1x40, 1x80	396	826	-	-	1,222	1,186
1x40, 1x90	396	918	-	-	1,314	1,278
3x30	306	306	306	-	918	882
2x30, 1x40	306	306	396	-	1,008	972
2x30, 1x60	306	306	606	-	1,218	1,182
2x30, 1x70	306	306	708	-	1,320	1,284
2x30, 1x80	306	306	826	-	1,438	1,402
2x30, 1x90	306	306	918	-	1,530	1,494
1x30, 2x40	306	396	396	-	1,098	1,062
1x30, 1x40, 1x60	306	396	606	-	1,308	1,272
1x30, 1x40, 1x80	306	396	826	-	1,528	1,492
1x30, 1x40, 1x90	306	396	918	-	1,620	1,584
3x40	396	396	396	-	1,188	1,152
2x40, 1x60	396	396	606	-	1,398	1,362
1x30, 1x40, 1x70	306	396	708	-	1,410	1,374
4x30	306	306	306	306	1,224	1,188
3x30, 1x40	306	306	306	396	1,314	1,278
2x30, 2x40	306	306	396	396	1,404	1,368
1x30, 3x40	306	396	396	396	1,494	1,458

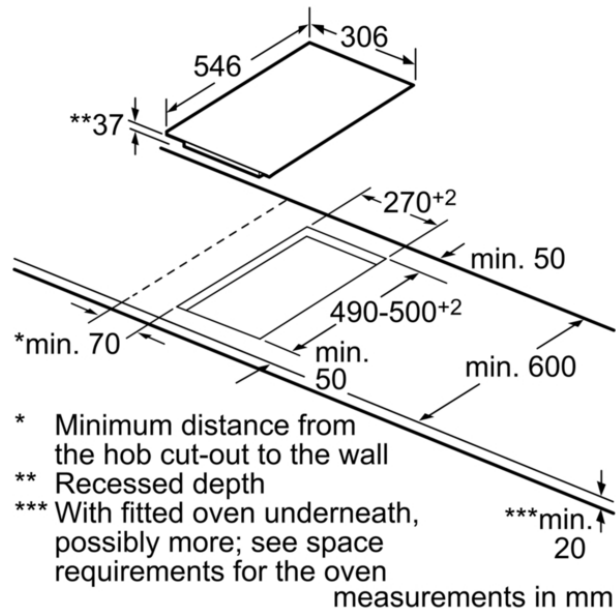

Domino combination options with corresponding appliance and cut-out dimensions (see table)

